

GIPS BAND

NAIL POINT SELF-ADHESIVE SEALING TAPE FOR PROFILES

INTUITIVE


Simple to apply adhesive strip, even using the unwinder LIZARD.

SOUND INSULATION

Vibration damper for the ribs of the supporting wall structure.

HERMETIC

Thanks to the closed cell structure, it is watertight and airtight, even if trimmed or drilled.

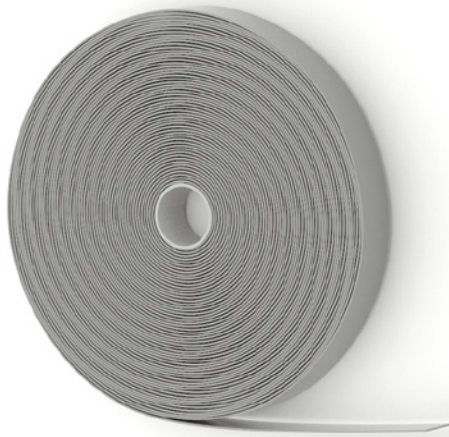

CODES AND DIMENSIONS

code	B [mm]	L [m]	s [mm]	pcs.
GIPSBAND50	50	30	3,0	10

TECHNICAL SPECIFICATIONS

Property	Standard	Value
Temperature resistance	-	-30 / +80 °C
Density	ISO 845	approx. 25 kg/m ³
Tear strength MD/CD	ISO 1926	325 / 220 kPa
MD/CD elongation	ISO 1926	125 / 115 %
Compression resistance:		
10%	ISO 3386/1	2 kPa
25%	ISO 3386/1	3 kPa
50%	ISO 3386/1	5 kPa
Reaction to fire	DIN 4102 / EN 13501	class B2/E
Water-absorbency	ISO 2896	<2 % vol
Thermal conductivity	-	0,04 W/mK (at +10 °C)
Storage temperature	-	+5 / +25 °C
Presence of solvents	-	NO
VOC emissions	-	< 0,02 % (class A+)

SAFE

Stable over time, thanks to its special mixture. Not susceptible to chemical substances.

MATERIAL

Support film and closed cell polyethylene (PE) foam profile with acrylic glue