


CEMENTA IN

SPECIAL HIGH-ADHESION TAPE, CAN BE ALSO PLASTERED

- Its excellent adhesion makes it ideal for application on most surfaces
- Even when applied in tight spaces and corners, the PP liner can be removed without risk of failure
- Technical fabric ideal to be subsequently plastered
- The easy-release PP liner provides a quick and easy installation. The pre-cut versions ensure optimum aesthetics thanks to the possibility of hiding the tape behind cladding or plaster

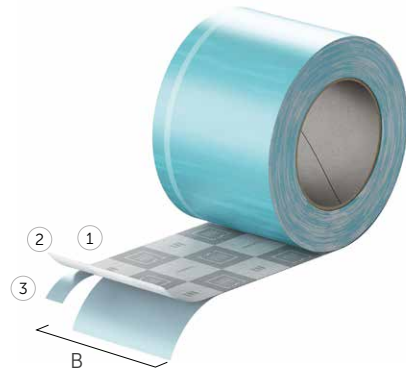

CODE	liner [mm]	B [mm]	L [m]	pcs
CEMIN1560	15 / 60	75	25	6
CEMIN1585	15 / 85	100	25	4
CEMIN15135	15 / 135	150	25	2

Thickness: 0,5 mm

COMPOSITION

- ① **support:** 2-layer PP vapour control membrane
- ② **glue:** acrylic dispersion without solvents
- ③ **release liner:** easy-release PP film

TECHNICAL DATA

properties	standard	value
mass per unit area	-	approx. 365 g/m ²
water vapour transmission (Sd)	-	approx. 22 m
watertightness	-	W1
tightness in heavy rain	-	conforming
air permeability	EN 12114	< 0,1 m ³ /(h·m·daPa ^{2/3})
UV resistance	-	3 months
reaction to fire	EN 13501-1	class E
solvents	-	no
EMICODE	GEV test procedure	EC1 ^{PLUS}
thermal resistance	-	-30 / +80 °C
application temperature	-	-10 / +50 °C
storage temperature ⁽¹⁾	-	+5 / +25 °C

⁽¹⁾ Store the product in a dry, covered location.

