


# CEMENTA OUT

## SPECIAL HIGH-ADHESION TAPE, CAN BE ALSO PLASTERED

- Its excellent adhesion makes it ideal for application on most surfaces
- Even when applied in tight spaces and corners, the PP liner can be removed without risk of failure
- Technical fabric ideal to be subsequently plastered
- The easy-release PP liner provides a quick and easy installation. The pre-cut versions ensure optimum aesthetics thanks to the possibility of hiding the tape behind cladding or plaster

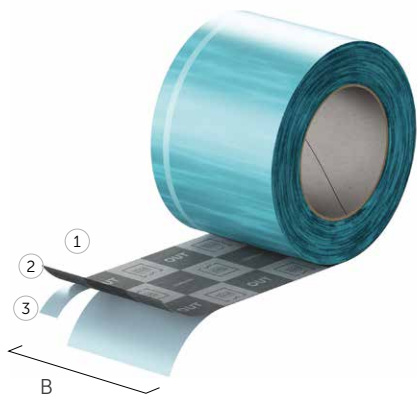

CODE	liner [mm]	B [mm]	L [m]	pcs
CEMOUT1560	15 / 60	75	25	6
CEMOUT1585	15 / 88	100	25	4
CEMOUT15135	15 / 135	150	25	2

Thickness: 0,7 mm

## COMPOSITION

- ① support: breathable 2-layer PP membrane
- ② glue: acrylic dispersion without solvents
- ③ release liner: easy-release PP film

## TECHNICAL DATA

properties	standard	value
mass per unit area	-	approx. 365 g/m <sup>2</sup>
water vapour transmission (Sd)	-	approx. 2 m
watertightness	-	W1
tightness in heavy rain	-	conforming
air permeability	EN 12114	< 0,1 m <sup>3</sup> /(h·m·daPa <sup>2/5</sup> )
UV resistance	-	12 months
reaction to fire	EN 13501-1	class E
solvents	-	no
EMICODE	GEV test procedure	EC1 <sup>PLUS</sup>
thermal resistance	-	-30 / +80 °C
application temperature	-	-10 / +50 °C
storage temperature <sup>(1)</sup>	-	+5 / +25 °C

<sup>(1)</sup> Store the product in a dry, covered location.

