

CHIMNEY CONNECTION

ALU FLASH CONNECT

ALUMINIUM AND SELF-ADHESIVE BUTYL VERSION



- Butyl adhesive adheres perfectly, creating a durable watertight seal
- It can be cut with a cutter or scissors
- Excellent UV and weather resistance

CODE	B [mm]	s [mm]	L [m]	B [in]	s [mil]	L [ft]	cladding	colour	RAL	
ALURRED300	300	2	5	11.8	79	16.40	aluminium 0,12 mm	brick red	8004	1
ALURBRO300	300	2	5	11.8	79	16.40	aluminium 0,12 mm	brown	8019	1
ALURBLA300	300	2	5	11.8	79	16.40	aluminium 0,12 mm	black	9004	1

Waste classification (2014/955/EU): 17 09 04.

SOFT FLASH CONNECT

EPDM AND BUTYL SELF-ADHESIVE VERSION



- Permanent UV stability
- Extremely flexible 3D surface
- It can be modelled by hand without special tools

CODE	B [mm]	s [mm]	L [m]	B [in]	s [mil]	L [ft]	cladding	colour	RAL	
SOFTRED300	300	2,5	5	11.8	98	16.40	EPDM 1,5 mm	brick red	8004	1
SOFTBRO300	300	2,5	5	11.8	98	16.40	EPDM 1,5 mm	brown	8019	1
SOFTBLA300	300	2,5	5	11.8	98	16.40	EPDM 1,5 mm	black	9004	1

Waste classification (2014/955/EU): 17 02 03.

MANICA ROLL

SELF-ADHESIVE LEAD AND BUTYL VERSION



- Smooth, perfectly malleable surface
- Permanent UV stability
- Excellent weather resistance

CODE	B [mm]	s [mm]	L [m]	B [in]	s [mil]	L [ft]	cladding	colour	RAL	
MANROLL1	300	1,5	5	11.8	59	16.40	lead 0,5 mm	brick red	8004	1
MANROLL2	300	1,5	5	11.8	59	16.40	lead 0,5 mm	brown	8017	1
MANROLL3	300	1,5	5	11.8	59	16.40	lead 0,5 mm	dark brown	8019	1
MANROLL4	300	1,5	5	11.8	59	16.40	lead 0,5 mm	black	9005	1
MANROLL5	300	1,5	5	11.8	59	16.40	lead 0,5 mm	graphite	7016	1


Avoid contact with skin, eyes and food. Do not produce and breathe dust.

RECOMMENDATIONS FOR INSTALLATION



GUTTER FLASHING

- Cold and water resistant
- Resistant to UV rays
- With polyester paint, protected by protective film

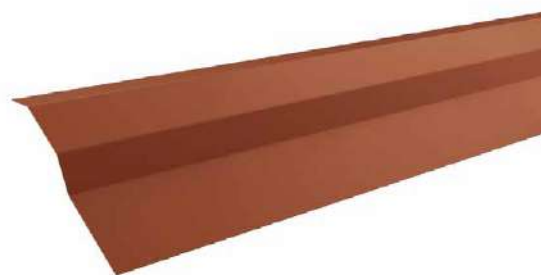

CODE	B [mm]	L [m]	B [in]	L [ft]	material	colour	RAL	
GUTRED80 ⁽¹⁾	80	2	3.1	7	aluminium	brick red	8004	20
GUTBRO80 ⁽¹⁾	80	2	3.1	7	aluminium	brown	8019	20
GUTBLA80 ⁽¹⁾	80	2	3.1	7	aluminium	black	9005	20

⁽¹⁾Products available only upon order.
Waste classification (2014/955/EU): 17 04 02.



ADJUSTABLE

The special adhesive butyl mix offers strong adherence, even on rough surfaces.

MATERIAL

Aluminium, EPDM and lead guarantee durability.