

SAR

SELF-DRILLING SCREW FOR STEEL, HEXAGONAL HEAD

- Self-perforating tip with bleeder geometry for excellent drilling capacity (up to 6 mm on steel)
- Self-tapping thread for steel and hexagonal head with dummy washer SW 10
- Carbonitrided steel screw with galvanic treatment and white zinc plating

MATERIAL: case-hardened steel with white zinc plating

Zn
ELECTRO
PLATED





d_1 [mm]	d_{UK} [mm]	CODE	L [mm]	A [mm]	A_2 [mm]	pcs
6,3 SW 10	12,50	SAR6360	60	min. 0 ÷ max. 48	max. 39	100
		SAR6370	70	min. 14 ÷ max. 58	max. 49	100
		SAR6380	80	min. 24 ÷ max. 68	max. 59	100
		SAR63100	100	min. 44 ÷ max. 88	max. 79	100
		SAR63120	120	min. 64 ÷ max. 108	max. 99	100
		SAR63140	140	min. 84 ÷ max. 128	max. 119	100
		SAR63160	160	min. 104 ÷ max. 148	max. 139	100
		SAR63180	180	min. 124 ÷ max. 168	max. 159	100
SAR63200	200	min. 144 ÷ max. 188	max. 179	100		

GEOMETRY

A fastening package

A_2 maximum package that
can be fastened with WBAZ

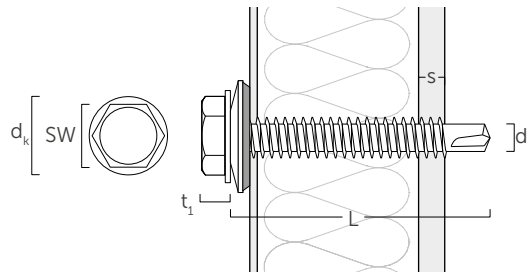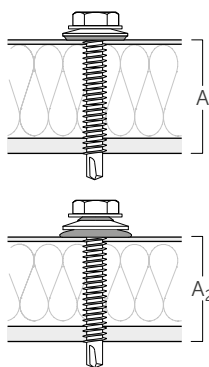

nominal diameter	d_1	[mm]	6,3
head diameter	d_K	[mm]	12,5
wrench size	SW		SW10
head thickness	t_1	[mm]	6,30
maximum hole thickness	s	[mm]	6,0