

LEVEL BAND




SEALING WALL BARRIER FOR FOUNDATIONS

WATERPROOF

It effectively resists humidity due to capillary action, while offering excellent resistance to water, air and wind.

VERSATILE

Available in three versions: ideal both as a wall barrier and to seal vertical wall - wall joints.

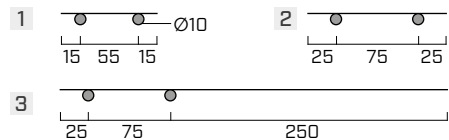

TECHNICAL DATA

Properties	standard	value	USC conversion
Maximum tensile force MD/CD	EN 12311-2	≥ 20 / ≥ 20 N/mm ²	≥ 2.9 / ≥ 2.9 lbf/mil ²
Elongation MD/CD	EN 12311-2	≥ 550 / ≥ 600 %	-
Resistance to nail tearing MD/CD	EN 12310-1	≥ 120 / ≥ 120 N/mm ²	≥ 17.4 / ≥ 17.4 lbf/mil ²
Watertightness	EN 1928	conforming	-
Reaction to fire	EN 13501-1	class E	-
Watertightness after artificial ageing	EN 1296 - EN 1931	conforming	-
Alkaline water vapour resistance	EN 1847 - EN 1931	conforming	-
Impact resistance	EN 12691	> 500 mm	-
Bendability at low temperatures	EN 495-5	-30 °C	-22 °F
Temperature resistance	-	-40 / +80 °C	-40 / +176 °F
Storage temperature ⁽¹⁾	-	+5 / +25 °C	+41 / +77 °F

⁽¹⁾Store the product in a dry, covered location.
Waste classification (2014/955/EU): 17 02 03.

CODES AND DIMENSIONS

CODE	B	s	L	B	s	L	
	[mm]	[mm]	[m]	[in]	[mil]	[ft]	
1 LEVEL085	85	0,17	25	3.4	7	82	10
2 LEVEL125	125	0,17	25	4.9	7	82	2
3 LEVEL350	350	0,17	25	13.8	7	82	2



ADJUSTABLE

The soft and elastic polyethylene profile allows it to be installed even in complex shapes and angles.

COST-PERFORMANCE

The choice of materials and optimisation in production results in a solution that offers a good balance between performance and cost.