

# NAIL BAND

## BUTYL NAIL POINT SEALANT TAPE



### SPECIAL BUTYL MIX

Thanks to its modified butyl formulation, it ensures excellent durability even when subjected to thermal stress. Also suitable for installation at low temperatures.

### LOW TEMPERATURES

The butyl ensures excellent adhesion to supports under difficult environmental conditions.


## TECHNICAL DATA

Properties	standard	value	USC conversion
Tensile strength	EN 14410	25 N/25 mm	5.71 lbf/in
Elongation at failure	EN 14410	> 300%	-
90° adhesion force	-	≥ 15 N/25 mm	≥ 3.43 lbf/in
Reaction to fire	EN 13501-1	class E	-
Temperature resistance	-	-30 / +80 °C	-22 / +176 °F
Application temperature	-	+5 / +40 °C	+41 / +104 °F
Storage temperature <sup>(1)</sup>	-	+5 / +25 °C	+41 / +77 °F
Solvents	-	no	-

<sup>(1)</sup>Store the product in a dry, covered location.  
Waste classification (2014/955/EU): 08 04 10.

## CODES AND DIMENSIONS

CODE	B	s	L	B	s	L	
	[mm]	[mm]	[m]	[in]	[mil]	[ft]	
NAILBAND50	50	1	15	2.0	39	49	12

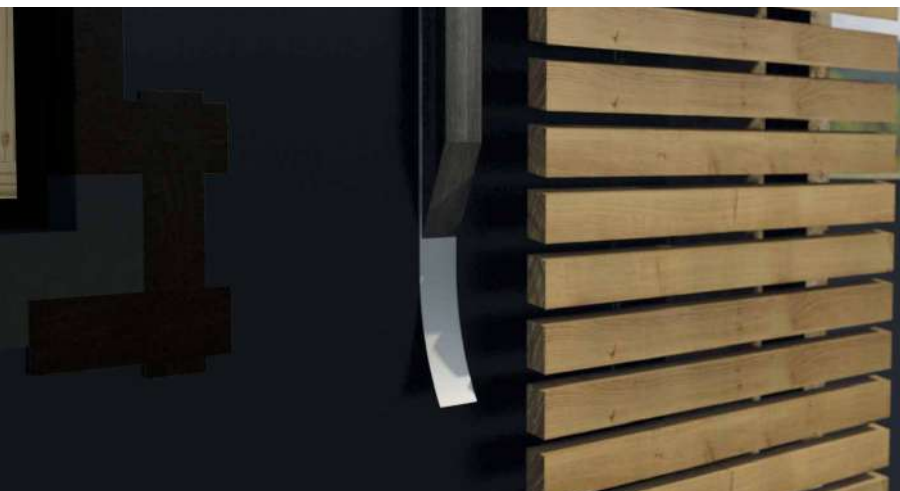

### SELF-SEALING

Due to its elasticity, butyl tends to seal around the screw or nail used to fix the battens or elements on which it is installed.

### DURABILITY

The butyl compound ensures excellent durability even under thermal stress, while maintaining elasticity and impermeability over time.