

ALU BUTYL BAND

REFLECTING BUTYL ADHESIVE TAPE



BUTYL

The butyl composition offers excellent adhesiveness on the most common surfaces, even very porous ones.

UV-STABLE

The reinforced aluminium coating protects the butyl mixture, guaranteeing that the seal lasts.

COMPOSITION

support
reinforced aluminium film

glue
grey adhesive butyl compound

release liner
PE film



TECHNICAL DATA

Properties	standard	value	USC conversion
Initial Tack	ASTM D 2979	8 N	1.8 lbf
Adhesion on steel at 180°	ASTM D 1000	20 N/cm	11.42 lbf/in
Vertical sliding	ISO 7390	0 mm	-
Maximum tensile force MD/CD	EN 12311-1	185 / 200 N/50 mm	21.13 / 22.84 lbf/in
Elongation at break point MD/CD	EN 12311-1	10 / 20 %	-
Water vapour resistance factor (μ)	UNI EN 1931	2720000	13600 MN·s/g
Reaction to fire	EN 13501-1	class E	-
Temperature resistance	-	-30 / +90 °C	-22 / 194 °F
Application temperature	-	0 / +40 °C	+32 / 104 °F
Watertightness	-	conforming	-
UV-resistant	-	permanent	-
Storage temperature ⁽¹⁾	-	+5 / +40 °C	+41 / 104 °F
Solvents	-	no	-
VOC emissions	ISO 16000	30 μg/m ³	-
French VOC classification	ISO 16000	A+	-

⁽¹⁾Store the product in a cool, dry place for no more than 12 months.
Waste classification (2014/955/EU): 08 04 99.

CODES AND DIMENSIONS

CODE	B	s	L	B	s	L	
	[mm]	[mm]	[m]	[in]	[mil]	[ft]	
ALUBUTYL75	75	1	10	3.0	39	33	8
ALUBUTYL150	150	1	10	5.9	39	33	4

■ FIELDS OF APPLICATION



■ RELATED PRODUCTS




ALU BAND
page 61



BYTUM SPRAY
page 46



BYTUM LIQUID
page 48

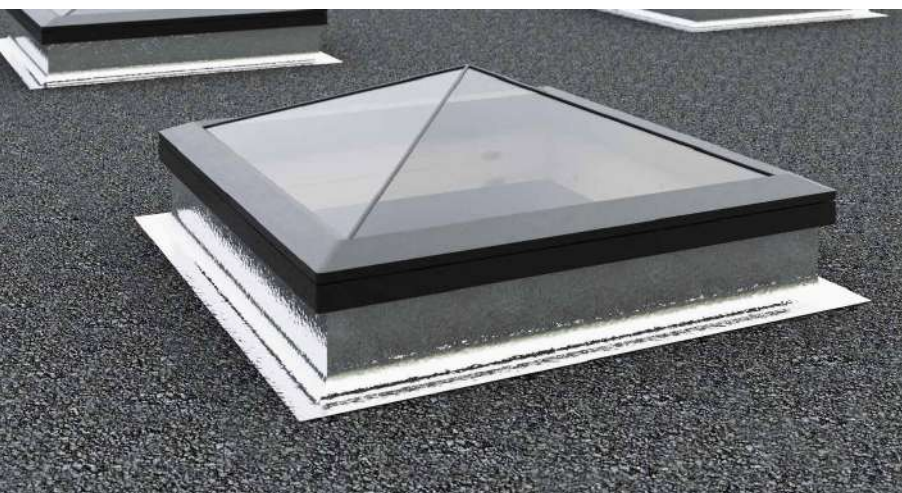

STRONG

Thanks to the reinforced aluminium film, it has outstanding mechanical properties and is tear-resistant.

VERSATILE

Widely used in building roofing, repair of surface cracks, repair of motor homes, windows, boat seals, glazing and roofing.