

STOP HOUSE 190 BARRIER SD150



3,2 m



EN 13984

VAPOUR BARRIER Sd 145 m

- Made of extruded polyethylene, it offers several possible applications, from temporary protection on the construction site to vapour control within the layers
- Also available in a 3,2 m version, it is also ideal for waterproofing floors
- Transparent, ensuring quick and easy installation

A
Onorm
B3667
DS

CH
SIA 232
V.v.u.

D
ZVDH
Ds

F
DTU 31.2
pare-va-
peur

I
UNI
11470
B/R2

AUS
AS/NZS
4200.1
Class 1

USA
IRC
Class 1

Data sheet
available online


COST
PERFORMANCE

SEE-THROUGH

CODE	tape	roll [m]	H [m]	L [m]	A [m ²]	
BAR150	-	1,5 x 25	1,5	25	37,5	52
BAR15032	-	1 x 25	3,2	25	80	52

COMPOSITION

- ① single layer: PE functional film

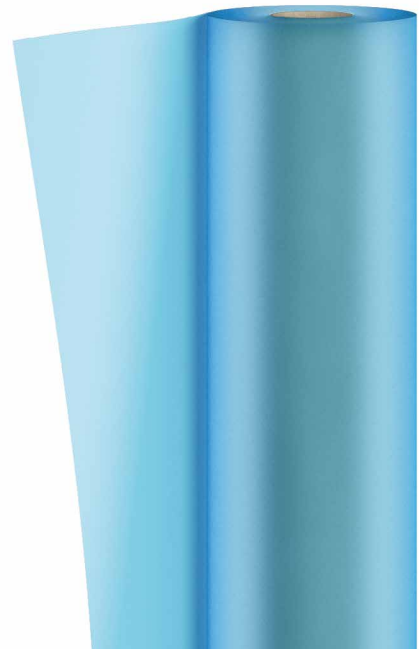

TECHNICAL DATA

properties	standard	value
mass per unit area	EN 1849-2	190 g/m ²
thickness	EN 1849-2	0,2 mm
water vapour transmission (Sd) ⁽¹⁾	EN 1931/EN ISO 12572	145 m
tensile strength MD/CD	EN 12311-2	> 206/180 N/50 mm
elongation MD/CD	EN 12311-2	> 100/100 %
resistance to nail tearing MD/CD	EN 12310-1	> 147/165 N
watertightness	EN 1928	compliant
water vapour resistance:		
- after artificial ageing	EN 1296/EN 1931	compliant
- in the presence of alkalis	EN 1847/EN 12311-2	compliant
reaction to fire	EN 13501-1	class E
resistance to penetration of air	EN 12114	< 0,02 m ³ /(m ² h50Pa)
resistance to temperature	-	-40/80 °C
indirect exposure to UV rays	-	2 weeks
thermal conductivity (λ)	-	0,4 W/(m·K)
specific heat	-	1800 J/(kg·K)
density	-	approx. 950 kg/m ³
water vapour resistance factor (μ)	-	approx. 725000
VOC	-	not relevant

⁽¹⁾Consult the Declaration of Performance for the minimum value.

Waste classification (2014/955/EU): 17 02 03.