

CEMENTA IN



SPECIAL HIGH-ADHESION TAPE, CAN BE PLASTERED

- Its excellent adhesion makes it ideal for application on most surfaces
- The PP liner can be easily removed even in tight spaces or corners, without risk of tearing.
- Plasterable technical fabric
- The easy-release PP liner provides a quick and easy installation. The pre-cut versions allow the tape to be concealed behind cladding or plaster, for a clean and precise result





CODE	liner		B		L		pcs
	[mm]	[in]	[mm]	[in]	[m]	[ft]	
CEMIN1560	15 / 60	0.6 / 2	75	3.0	25	82	6
CEMIN1585	15 / 85	0.6 / 3.4	100	4.0	25	82	4
CEMIN15135	15 / 135	0.6 / 5.3	150	5.9	25	82	2

Thickness: 0,5 mm

COMPOSITION:

- ① **support:** 2-layer PP vapour control membrane
- ② **glue:** acrylic dispersion without solvents
- ③ **release liner:** easy-release PP film

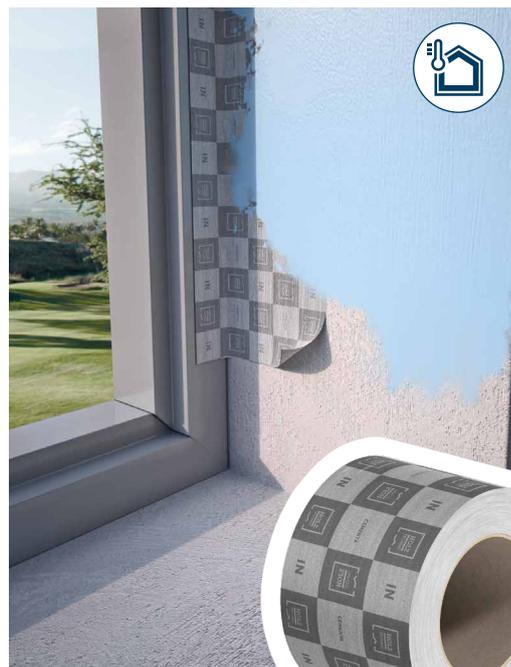

TECHNICAL DATA

properties	standard	value
Thickness	-	0,7 mm
Water vapour transmission (Sd)	EN ISO 12572	< 0,5 m
Watertightness	EN ISO 13859-1	W1
Reaction to fire	EN 13501-1	E
Adhesion strength on OSB at 90° after 10 minutes	EN ISO 29862	8,5 N/10mm
Adhesion strength on OSB at 180° after 10 minutes	EN ISO 29862	8,5 N/10mm
Adhesion strength (average) on membrane in PP after 24 hours ⁽¹⁾	EN ISO 12316-2	16 N/50mm
Resistance to temperature	-	-40/+100 °C
Application temperature ⁽²⁾	-	-5/+40 °C
Storage temperature ⁽³⁾	-	+5/+25 °C
Exposure to weather	-	3 months
Resistance to heavy rain	DIN 4108	compliant
Resistance to penetration of air	EN 12114	< 0,1 m ³ /(h·m·daPa ^{2/3})
Solvents	-	no

⁽¹⁾ Minimum required value according to DTU 31.2 P1-2 (France): 15 N/50 mm.

⁽²⁾ On dry support and at a temperature > 0 °C. The absence of condensation or frost on the surface must be guaranteed.

⁽³⁾ Store the product in a cool, dry place for no more than 6 months.