
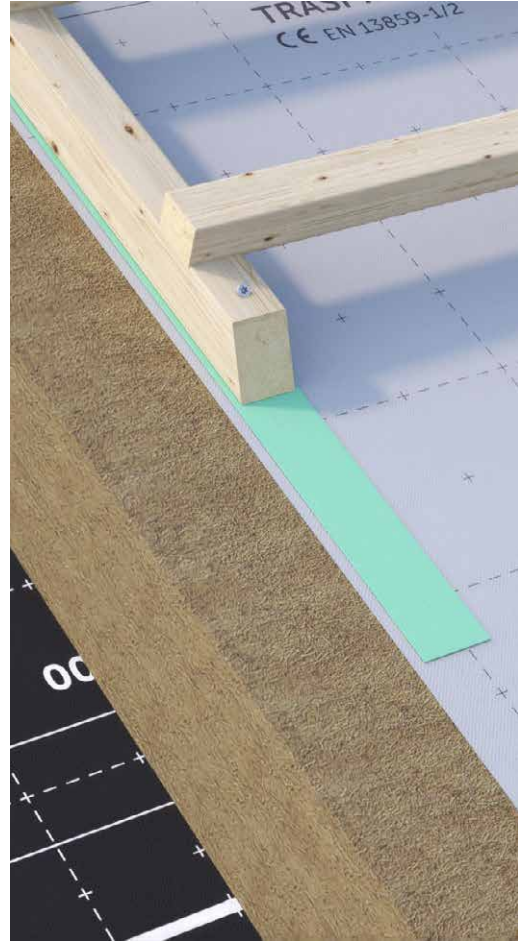


FILLUM

HIGH-ADHESION NAIL POINT SEALANT TAPE

- The closed cell polyethylene structure ensures the opening created by the fastening systems is waterproof
- With the help of LIZARD unwinder, installation is easy and fast, done directly on the ventilation battens

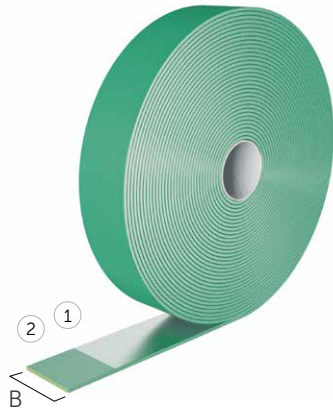

CODE	B [mm]	s [mm]	L [m]	pcs
FILLUM550	50	5	10	6

COMPOSITION

- ① support: PE foam
- ② glue: acrylic dispersion without solvents

TECHNICAL DATA

properties	standard	value
Tensile strength	EN 1939	material failure
Temperature resistance	-	-30 / +80 °C
Application temperature	-	≥ +5 °C
Storage temperature ⁽¹⁾	-	+5 / +25 °C
Solvents	-	no

⁽¹⁾ Store the product in a cool, dry place for no more than 12 months.
Waste classification (2014/955/EU): 08 04 10.