



# FENESTRA

## SELF-EXPANDING SEALING TAPE FOR WINDOWS/DOORS

- It seals the joints of doors and windows from air and heavy rain while maintaining the thermal-acoustic properties over the entire depth
- For cracks between 6 and 15 mm. It adapts to the surface, ensuring air and water tightness by acting as a vapour control membrane
- With just one solution it is possible to seal the three layers without the need for additional products

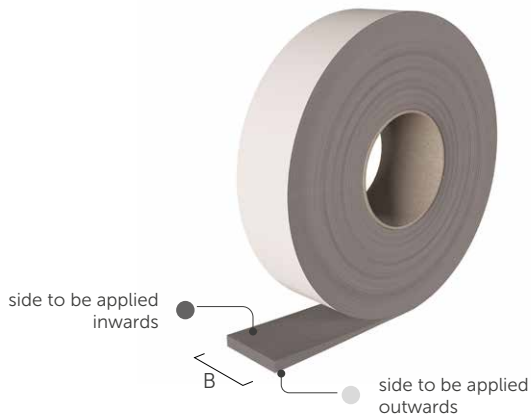

BG 1

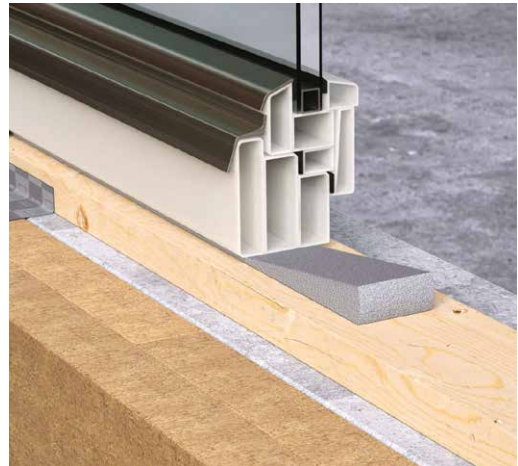

CODE	B [mm]	s [mm]		L [m]	pcs
FENESTRA54615	54	6	15	15	7
FENESTRA74615	74	6	15	15	5

## COMPOSITION

elastic polyurethane foam with additives

## TECHNICAL DATA

properties	standard	value
Classification	DIN 18542	BG 1
Airtightness	EN 12114	$\alpha \leq 1.0 \text{ m}^3/(\text{h} \cdot \text{m} \cdot (\text{daPa})^n)$
Tightness in heavy rain	EN 1027	$\geq 600 \text{ Pa}$
Resistance to UV and weathering	DIN 18542	compliant with class BG 1
Compatibility with other building materials	DIN 18542	compliant with class BG 1
Water vapour resistance factor ( $\mu$ )	EN ISO 12572	$< 100$
Vapour pressure gradient	-	externally permeable
Reaction to fire	DIN 4102-1	class B1
Acoustic insulation of the joint		59 dB
Thermal conductivity ( $\lambda$ )	EN 12667	$\leq 0.043 \text{ W}/(\text{m} \cdot \text{K})$
Temperature resistance	-	$-30 / +90 \text{ }^\circ\text{C}$
Application temperature	-	$\geq +5 \text{ }^\circ\text{C}$
Storage temperature <sup>(1)</sup>	-	$+1 / +20 \text{ }^\circ\text{C}$

<sup>(1)</sup> Store the product in a cool, dry place for no more than 24 months.  
Waste classification (2014/955/EU): 17 02 03.