

DECK BAND UV



BUTYL ADHESIVE TAPE

- Suitable for both decks and façades, it protects the timber battens from humidity and heavy rain
- The reinforced aluminium backing ensures permanent UV resistance
- The mix closes over the perforations and remains perfectly watertight




CODE	B		L		pcs
	[mm]	[in]	[m]	[ft]	
DECKUV75	75	3.0	10	33	8
TERRAUV100	100	3.9	10	33	6
TERRAUV200	200	7.9	10	33	4
TERRAUV400	400	15.8	10	33	2

Thickness 0,8 mm

COMPOSITION:

- ① support: UV-stable anthracite-coloured reinforced aluminium film
- ② glue: grey adhesive butyl compound
- ③ release liner: PE film

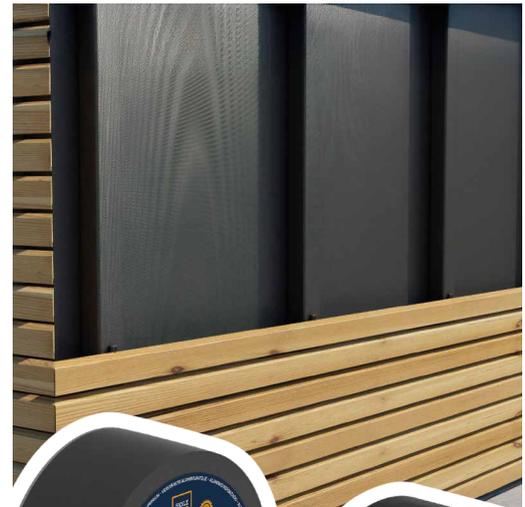

TECHNICAL DATA

properties	standard	value
thickness	-	0,8 mm
initial Tack +23/+5 °C	ASTM D 2979	7,2/13 N
adhesion strength on steel at 180°	ASTM D 1000	20 N/10 mm
vertical sliding	ISO 7390	0 mm
tensile strength MD/CD	EN 12311-1	185/200 N/50 mm
elongation MD/CD	EN 12311-1	10/20 %
water vapour resistance factor (μ)	UNI EN 1931	2720000
reaction to fire	EN 13501-1	class E
resistance to temperature	-	-40/+100 °C
application temperature ⁽¹⁾	-	+0/+40 °C
watertightness	-	compliant
resistant to UV rays	-	permanent
storage temperature ⁽²⁾	-	+5/+40 °C
French VOC classification	ISO 16000	A+
VOC emissions	EN 16516	very low
solvents	-	no

⁽¹⁾ On dry support and at a temperature > 0 °C. The absence of condensation or frost on the surface must be guaranteed.

⁽²⁾ Store the product in a cool, dry place for no more than 12 months.

♻️ Waste classification (2014/955/EU): 08 04 10.