


COMPRIMO

SELF-EXPANDING SEALING TAPE

- After expansion, it remains elastic and unchanged over time, providing protection from water, dust and wind
- It has passed the most stringent tests on harmful emissions, ensuring safe installation even indoors
- Supplied with a plastic core to prevent moisture absorption during construction, which could cause unwanted swelling



BG 1

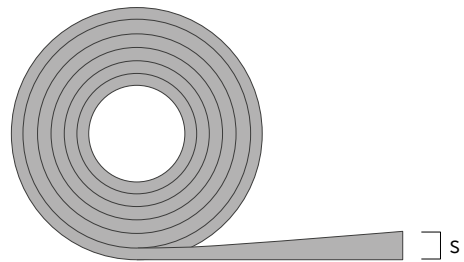

CODE	B [mm]	s [mm]		L [m]	pcs
COMPRIMO20920	20	9	20	4	24

COMPOSITION

elastic polyurethane foam with additives

TECHNICAL DATA

properties	standard	value
Classification	DIN 18542	BG 1
Airtightness	EN 12114	$\alpha \leq 1,0 \text{ m}^3/(\text{h} \cdot \text{m} \cdot (\text{daPa})^0)$
Tightness in heavy rain	EN 1027	$\geq 750 \text{ Pa}$
Resistance to UV and weathering	DIN 18542	compliant with class BG 1
Compatibility with other building materials	DIN 18542	compliant with class BG 1
Water vapour transmission (Sd)	EN ISO 12572	$< 0,5 \text{ m}$
Reaction to fire	DIN 4102-1	class B1
Thermal conductivity (λ)	EN 12667	$\leq 0,043 \text{ W}/(\text{m} \cdot \text{K})$
Temperature resistance	-	$-30 / +90 \text{ }^\circ\text{C}$
Application temperature	-	$\geq +5 \text{ }^\circ\text{C}$
Storage temperature ⁽¹⁾	-	$+1 / +20 \text{ }^\circ\text{C}$

⁽¹⁾Store the product in a dry, covered location for no more than 24 months.
Waste classification (2014/955/EU): 17 02 03.