

FILLUM

HIGH-ADHESION NAIL SEALING TAPE

- The closed cell polyethylene structure ensures the opening created by the fastening systems is waterproof
- Also available in 5 mm thickness and 70 mm width for more secure sealing
- With the help of LIZARD unwinder, installation is easy and fast, done directly on the ventilation battens




NAIL POINT

CODE	B		s		L		pcs
	[mm]	[in]	[mm]	[mil]	[m]	[ft]	
FILLUM350	50	2.0	3	118	30	98	10
FILLUM550	50	2.0	5	197	10	33	6
NAILPLA370	70	2.8	3	118	30	98	7
NAILPLA33050	50	2.0	3	118	50	164	6

400 pieces per roll, s = thickness

COMPOSITION:

- ① support: PE foam
- ② glue: acrylic dispersion without solvents

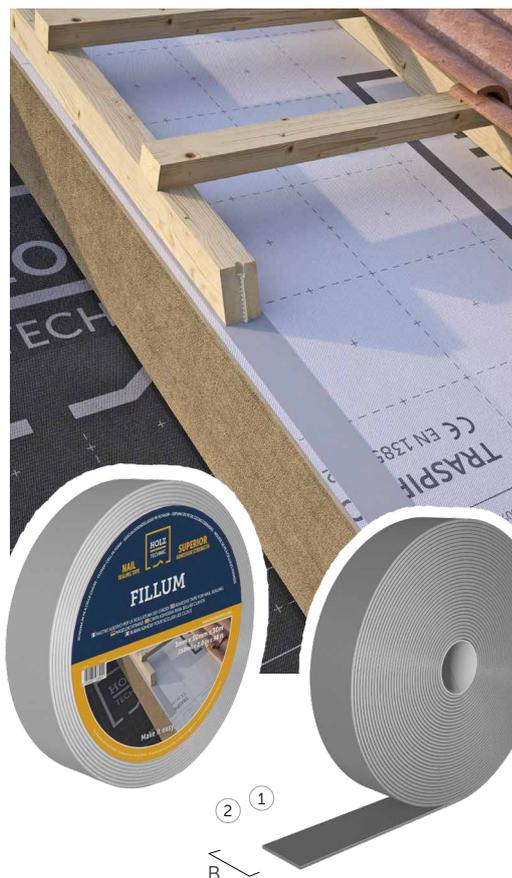

TECHNICAL DATA

properties	value
adhesion strength	greater than product strength
resistance to heavy rain	≥ 600 Pa
resistance to temperature	-30/+80 °C
application temperature ⁽¹⁾	≥ +5 °C
storage temperature ⁽²⁾	+5/+25 °C
solvents	no

⁽¹⁾ On dry support and at a temperature > 0 °C. The absence of condensation or frost on the surface must be guaranteed.

⁽²⁾ Store the product in a cool, dry place for no more than 12 months.

♻️ Waste classification (2014/955/EU): 07 02 13.